# **EM-W41**

# **WEICHAI Engine**







Service	PRP	ESP
Power (kva)	37.5	41
Power (kw)	30	33
Rated speed ( r.p.m)	1800	
Rated Power factor	0.8 @lagging	



#### **CERTIFICATE:**

EMEAN Power gensets are compliant with ISO 9001 and CE standard, which include the following directives: EN ISO 12100:2010. EN ISO 8528-13:2016, EN 60204-1:2006+A1:2009+AC:2010,

EN 55012:2007+A1:2009






Performance		
Engine Brand	WEICHAI	
Engine model	WP2.3D47E201/43KW	
Alternator	VG-184G/30KW	
Breaker	CHNIT MCCB 3P	
Control system	AMF digital panel	
Fuel consum. @100% load	7.7 L/h	

#### **POWER DEFINITION:**

PRP(Prime Power): Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1.

ESP(Standby Power): The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed

Dimension		
Туре	Open	Silent
Length (L)	1820mm	2000mm
Width (W)	760mm	900mm
Height (H)	1150mm	1150mm
Net Weight	640kg	790kg

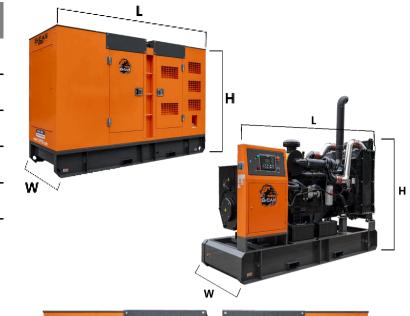

### 1.power by Brand new water cooled diesel engine 3. Working condition: 0°C ~+40°C (Antifreeze system 4. Base frame fuel tank for continue 8-10hrs running 6.MCCB air circuit breaker for over current shutdown





#### Standard Features:


- 2.Brushless alternators (Class H, with AVR)
- needed if below 0°C)
- 5. Digital control panel with auto protection
- 7.Industrial silencer for silent type generator sets
- 8. Humanized design, simple operation, easy maintenance
- 9. Ventilation parts are designed with modular principles
- 10. Soundproof canopy which lined with sound reducing
- 11.All metal canopy parts are painted by powder foam
- 12. Glass Panel window
- 13.Lockable doors on front and back side for easy maintenance
- 14. Easy maintenance and operation
- 15. Easy lifting and moving, there is forklift hooks and crane holes on chassis
- 16.External emergency stop button
- 17. Steel chassis and anti-vibration pads
- 18.Includes diesel level sensor information to the

#### Warranty

We shall provide a warranty of 12 months or 1200 hours from B/L date (whichever comes first), covering all manufacturing defects. We replace damaged parts caused by manufacturing faults or defected parts/materials, but exclude the damageable parts due to customer's incorrect man-made operation. After expiration, we still provides technical and spare parts support with cost for maintenance.

#### **WEICHAI WP2.3D47E201/43KW**

Please download the detailed engine data sheet



#### Alternator VG-184G/30KW

Please download the detailed alternator data sheet



#### **Digital control panel**

Please download the detailed controller manual



#### **AUTOMATIC SHUTDOWN AND FAULT CONDITIONS**

- Under/over speed; fail to start
- ·High engine temperature; fail to stop
- •Low oil pressure; charge fail
- Under/over generator volts; over current
- Under/over generator frequency; emergency stop
- Under/over mains frequency
- Under/over mains voltage
- ·Low/high battery volts

#### **CHNIT MCCB breaker 3P**



#### Sealed 12/24V Dry battery



**ATS** 



**Remote Control** 



Charger



**Jacket Heater** 



**Oil Heater** 



**Extra Fuel Tank** 



**Parallel Cabinet** 



**Trailer** 



## **Contact Information**

Email: sale5@fjepos.com

Phone: +86 19890349907

**WHATSAPP** 



**WECHAT** 



**VIBER** 

